

1-11-00

A

Please type a plus sign (+) inside this box → ☐

01/10/00
1c544 U.S. PTO

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

PTO/SB/05 (12/97)
Approved for use through 09/30/00 OMB 0651-0032
Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE

UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 CFR 1.53(b))	Attorney Docket No.	PCOS:077	Total Pages	22
	First Named Inventor or Application Identifier			
	Susan P. Evans			
	Express Mail Label No.	EM340962376US, filed January 10, 2000		

APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents.	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
<div>1. <input checked="" type="checkbox"/> Fee Transmittal Form (Submit an original, and a duplicate for fee processing)</div> <div>2. <input checked="" type="checkbox"/> Specification [Total Pages 20] (preferred arrangement set forth below)<ul style="list-style-type: none">- Descriptive title of the Invention- Cross References to Related Applications- Statement Regarding Fed sponsored R & D Invention- Reference to Microfiche Appendix- Background of the Invention- Brief Summary of the Invention- Brief Description of the Drawings (if filed)- Detailed Description- Claim(s)- Abstract of the Disclosure</div> <div>3. <input checked="" type="checkbox"/> Drawing(s) (35 USC 113) [Total Sheets 7]</div> <div>4. <input checked="" type="checkbox"/> Oath or Declaration [Total Pages 2]<ul style="list-style-type: none">a. <input checked="" type="checkbox"/> Newly executed (original or copy)b. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed) [Note Box 5 below]<ul style="list-style-type: none">i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).</div> <div>5. <input type="checkbox"/> Incorporation By Reference (useable if Box 4b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.</div> <div>6. <input type="checkbox"/> Microfiche Computer Program (Appendix)</div> <div>7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)<ul style="list-style-type: none">a. <input type="checkbox"/> Computer Readable Copyb. <input type="checkbox"/> Paper Copy (identical to computer copy)c. <input type="checkbox"/> Statement verifying identity of above copies</div>	
Accompanying Application Parts <div>8. <input type="checkbox"/> Assignment Papers (cover sheet & document(s))</div> <div>9. <input type="checkbox"/> 37 CFR 3.73(b) Statement <input type="checkbox"/> Power of Attorney (when there is an assignee)</div> <div>10. <input type="checkbox"/> English Translation Document (if applicable)</div> <div>11. <input type="checkbox"/> Information Disclosure <input type="checkbox"/> Copies of IDS Statement (IDS)/PTO-1449 Citations</div> <div>12. <input type="checkbox"/> Preliminary Amendment</div> <div>13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized)</div> <div>14. <input type="checkbox"/> Small Entity <input type="checkbox"/> Statement filed in prior application, Statement(s) Status still proper and desired</div> <div>15. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)</div> <div>16. <input checked="" type="checkbox"/> Other Check No. 8060 for \$690.00</div>	

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:
☐ Continuation ☐ Divisional ☒ Continuation-in-part (CIP) of prior application No: 09/346,752

18. CORRESPONDENCE ADDRESS					
<input type="checkbox"/> Customer Number or Bar Code Label (Insert Customer No or Attach bar code label here) or <input type="checkbox"/> New correspondence address below					
NAME	Ronald B. Coolley				
ADDRESS	Arnold White & Durkee P.O. Box 4433				
CITY	Houston	STATE	Texas	ZIP CODE	77210-4433
COUNTRY	U.S.A.	TELEPHONE	(312) 744-0090	FAX	(312) 755-4489

Name (Print/Type)	Harold N. Wells	Registration No. (Attorney/Agent)	26,044
Signature	<i>Harold N. Wells</i>	Date	1/10/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box CPA, Washington, DC 20231

**PATENT
PCOS:077**

APPLICATION FOR UNITED STATES LETTERS PATENT

for

OXYGEN SCAVENGER ACCELERATOR

by

Susan P. Evans

Vinod K. Luthra

Gary R. DelDuca

EXPRESS MAIL MAILING LABEL

EXPRESS MAIL NO.: EM340962376US
DATE OF DEPOSIT: January 10, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "EXPRESS MAIL POST OFFICE TO ADDRESSEE" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to: Assistant Commissioner for Patents, Attn: Box Patent Application, Washington D.C. 20231.

Signature: _____

James M. Sklena

The present application is a continuation-in-part of pending U.S. Application No. 09/346,752, filed July 2, 1999, which is a continuation of U.S. Application No. 08/856,448, filed May 14, 1997, and issued as U.S. Patent No. 5,928,560 on July 27, 1999, which is a continuation-in-part of U.S. Application No. 08/700,644, filed August 8, 1996, and now abandoned.

The present invention relates generally to a device and method for maximizing the rate of oxygen uptake of an oxygen absorber. More particularly, the invention relates to an iron based oxygen scavenging packet having an improved composition for accelerating the rate of oxygen absorption wherein the packet is specifically designed to be used in a packaging system designed to keep meat fresh.

Perishable foods, such as meats, fruits, and vegetables are typically placed into packaging systems after harvesting in order to preserve these foods for as long as possible. Maximizing the time in which the food remains preserved, especially the time between initial packaging at the plant and delivery at the retail grocery store, increases the profitability of all entities in the chain of distribution by minimizing the amount of spoilage.

2

One way to insure a minimal level of oxygen in a meat package is to subject the package or rigid gas barrier materials to a vacuum in order to remove as much of the gas in the package as possible prior to sealing the package. The package can then be sealed and the meat maintained in a "zero" atmosphere environment (commonly referred to as vacuum packaging). Under vacuum packaging conditions, red meat turns purple. Consumers, however, prefer to see their meat bright red. As a result, vacuum packaging has not been well accepted for consumer cuts of meat.

Another means of insuring a minimal level of oxygen in a meat package is to seal the meat in a refill modified atmosphere packaging system. This kind of modified atmosphere packaging technology (MAP) is so successful that meat can be cut and packaged several weeks before purchase and still remain fresh. Such systems typically utilize multiple layers of packaging. The outside layer of packaging is generally a rigid container with good barrier properties. The inner layer of packaging is an oxygen permeable film. To provide a modified atmosphere environment, the air-evacuated package is typically filled with a mixture of gases consisting of about 30% carbon dioxide (CO₂) and 70% nitrogen (N₂). Refilling the air-evacuated package with such a mixture of gases is believed to suppress the growth of anaerobic bacteria. The outer layer is peeled off just prior to presenting the consumer cut for sale at the supermarket. This allows the meat to rebloom to a bright red color. An excellent example of such an evacuation and refill MAP process is described in U.S. Patent No. 5,115,624 to Garwood. Vacuum packaging and refill MAP is very expensive for three reasons. First, the rigid part of the package is expensive. Second, processing speeds are slow due to the vacuum and refill steps. And third, the equipment to do these procedures is very complicated and expensive.

Another less expensive means of insuring a minimal level of oxygen in a meat package is to use a gas flush MAP process. The complicated steps of evacuating the package and refilling with the desired gas mixture are eliminated. The outer bag (a

barrier layer), is simply flushed with the proper gas mixture as it is formed around the inner container. The flush process reduces the oxygen content of the package to about 2%. An oxygen scavenger is placed in the package to absorb additional oxygen just prior to or simultaneously with forming and flushing the outer bag. An excellent
5 example of such a MAP system is described in U.S. Patent No. 5,698,250 to DelDuca et al.

A critical feature of a gas flush MAP packaging system is the ability to keep meat looking fresh and palatable. Oxidized meat turns an undesirable brown color. Accordingly, as discussed, an oxygen scavenger is typically placed inside the meat
10 package in order to absorb any residual oxygen within the package after gas flushing and sealing the package. It is critically important to quickly remove the oxygen from meat to prevent it from turning brown. Especially important in preventing the irreversible change from red to brown is the *rate* at which oxygen is scavenged. If oxygen is removed quickly, the packaged meat turns a purple red color. This purple
15 red color quickly "blooms" to a bright red color upon removal of the outer layer of packaging.

Oxygen scavengers are increasingly being used in packaging systems in order to protect various products from the detrimental effects of oxygen exposure. Several oxygen scavengers utilize the oxidation of particulate iron as a method to absorb
20 oxygen. A small amount of water is essential for this reaction. In some instances, a water attracting agent such as silica gel can be used to attract water and at times to supply water in the packet initially. A major drawback to this technology is, however, the limited amount of water that can be supplied. Typically, a major portion of the water needed for the oxidation of particulate iron is provided by the product and/or
25 packaging environment being protected. This is oftentimes an inadequate amount to promote the efficient and expedient oxidation of iron. And as mentioned, the slower the rate of oxygen reduction, the more likely meat will turn irreversibly brown.

A need thus exists to accelerate the rate of oxygen scavengers, particularly in the confines of a modified atmosphere packaging system. It would be desirable to
30 lower the oxygen level to about 0.04% (400 PPM) with a predetermined period of time, preferably within 90 minutes and to about 0 within 24 hours.

SUMMARY OF THE INVENTION

The present invention provides an iron-based oxygen scavenging packet which exhibits an increased rate of oxygen absorption especially in the confines of a concomitant meat packaging system. The invention specifically provides an oxygen scavenging packet which comprises an iron-based oxygen absorber and an oxygen uptake accelerator comprising water. The oxygen uptake accelerator accelerates the rate of oxygen uptake of the iron-based absorber and typically an optimum amount can be determined for a given iron-based absorber, above which the rate of oxygen uptake is reduced. In a preferred embodiment, the invention provides an oxygen scavenging packet where an optimum ratio of between 0.2 and 1.4 mL of oxygen uptake accelerator to about 2.5 grams of iron is present in the packet. Water makes an excellent accelerator but acids and other electron acceptors may be included.

BRIEF DESCRIPTION OF THE DRAWINGS

Other objects and advantages of the invention will become apparent upon reading the following detailed description and upon reference to the drawings.

FIG. 1 illustrates an oxygen scavenging packet in which the oxygen uptake accelerator is being introduced into the packet via a syringe.

FIGS. 2a and 2b, respectively, illustrate an oxygen scavenging packet containing a capsule which can be ruptured at an appropriate time to release the oxygen uptake accelerator and a packet containing a capsule being ruptured.

FIGS. 3a and 3b, respectively, illustrate an oxygen scavenging packet including a protruding wick for absorption of the oxygen uptake accelerator into the packet and an oxygen scavenging packet in which the wick is being dipped into the oxygen scavenger accelerator.

FIG. 4 is an isometric view of the oxygen scavenging packet of the instant invention inside a modified atmosphere packaging system.

FIG. 5 is a graph illustrating the rate of oxygen absorption when a dry oxygen scavenging packet is introduced into a quart sized container which also includes 0.5 mL of water.

FIG. 6 is a graph illustrating the rate of oxygen absorption when an oxygen scavenging packet having 0.5 mL of water injected into the packet is introduced into a quart sized container.

FIG. 7 is a graph illustrating the rate of oxygen absorption as a function of the amount of water injected into oxygen scavenging packets.

FIG. 8 illustrates the rate of oxygen absorption in the presence of varying amounts of CO₂ utilizing an oxygen scavenging packet which has been injected with 0.6 mL of water.

FIG. 9 is a graph illustrating the rate of oxygen absorption as a function of the number of oxygen scavenging packets introduced into a one quart jar.

FIG. 10 is a graph showing the percent oxygen after 1 hour as a function of the amount of acetic acid (vinegar) injected into each of two oxygen scavenging packets.

FIG. 11 is a graph showing the percent oxygen as a function of time and as a function of the material injected into the oxygen scavenging packets.

FIG. 12 is a graph illustrating the rate of oxygen absorption as a function of the amount of acetic acid injected into an iron containing packet and further as a function of whether or not the packet contains impregnated silica gel.

FIG. 13 is a graph illustrating the rate of oxygen absorption as a function of time and the concentration of acetic acid in water.

While the invention is susceptible to various modifications and alternative forms, certain specific embodiments thereof have been shown by way of example in the drawings and will be described in detail. It should be understood, however, that the intention is not to limit the invention to the particular forms described. On the contrary, the intention is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the invention as defined by the appended claims.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Turning now to the drawings, FIGS. 1 through 3 (a and b) depict an oxygen scavenging packet having a liquid oxygen uptake accelerator present in some form within the packet.

Specifically, FIG. 1 depicts an oxygen scavenging packet containing elemental iron 12 and in which an oxygen uptake accelerator 14 is introduced into the

FIG. 2a depicts an oxygen scavenging packet 20 containing elemental iron 22 and in which an oxygen uptake accelerator 24 is present inside a capsule 26. As FIG. 2b shows, the capsule 26 may be ruptured by mechanical force at an appropriate time in order to release the oxygen uptake accelerator 24. Optimally, the capsule should be ruptured immediately prior to or immediately after the sealing of the package in order to properly activate the iron-based scavenger for accelerated oxygen uptake.

FIG. 3a depicts an iron-based oxygen scavenging packet 30 containing elemental iron (not specifically shown) and in which an oxygen uptake accelerator 32 can be introduced into the packet by absorption onto a wick 34 which protrudes from the packet. As FIG. 3b shows, the wick 34 dipped into the oxygen uptake accelerator 32. An appropriate amount of oxygen uptake accelerator 32 is absorbed through the wick 34 into the packet 30. Optimally, the dipping occurs immediately prior to the sealing of the package in order to properly activate the iron based scavenger for accelerated oxygen uptake.

Further information concerning the construction of the oxygen absorber packet preferred for use in the instant invention may be obtained from U.S. Patent No. 5,262,375 to McKedy. The preferred oxygen absorber packets are manufactured by Multi-form Desiccants Incorporated. However, other iron-based oxygen absorbers will work comparably well in the instant invention.





The instant invention particularly concerns an iron-based oxygen scavenging packet which contains an oxygen uptake accelerator consisting of water or an aqueous solution of some other substance dissolved in or mixed with water. The oxygen uptake accelerator accelerates the rate of oxygen uptake of the oxygen absorber. This effect typically has been found to exhibit an optimum ratio of accelerator to iron. That is, the oxygen uptake increases as more accelerator is added, until beyond the optimum the oxygen uptake rate decreases, as will be seen in the Examples below. It

has now been found that the optimum ratio of acceleration to iron may be found in a wider range than previously thought to be required and determined by the activity of the oxygen absorber. Water alone will activate and accelerate iron-based oxygen absorbers via the presence of hydronium ions in the water. However, dilute acid solutions and other electron acceptors may be added.

Acids provide increased numbers of hydronium ions which increase the oxidation rate of iron by acting as electron acceptors. These electron acceptors facilitate the ionization of neutral iron. Once ionized, the iron readily reacts with the available oxygen and water to form a hydrated iron oxide. Other electron acceptors such as the positively charged ions making up salt solutions or metals such as copper also facilitate the ionization of neutral iron.


One preferred aqueous solution of the instant invention is an aqueous solution which contains approximately 5% acetic acid.

The introduction of water or an aqueous solution of acid, salt or appropriate metal into the oxygen absorber packet of an iron-based oxygen absorber serves to activate and dramatically increase the rate of oxygen uptake of the iron inside the packet. The particulate iron in the packet, in effect, turns to rust as oxygen is absorbed from the atmosphere surrounding the packaged meat or other packaged food product. As discussed, the water or aqueous solution enhances oxygen absorption by the iron by acting as an electron acceptor. A proposed mechanism for rust formation is as follows.



In step (1) ferrous ions are produced by loss of electrons from the elemental particulate iron in the packet. However, this process cannot go very far unless there is some way to get rid of the electrons which accumulate on the residual Fe. One way to do this is by step (2) in which H_3O^{+} ions either from the water or from acid substances in the water, pick up the electrons to form neutral H atoms. Since Fe is known to be a good catalyst for hydrogenation reactions in general, it is believed that step (3) now occurs to use up the H atoms. In the meantime, the ferrous ion reacts with O_2 gas by

step (4) to form the rust and restore H_3O^+ required for step (2). The net reaction, obtained by adding all four steps is



Acid accelerates the reaction by providing excess hydronium ions (H_3O^+) and driving step 2. Therefore, the preferred embodiment of the present invention utilizes a dilute aqueous solution of acid. Such acid solutions should, of course, be compatible with food products and include, for instance, acetic acid and/or citric acid.

Salt solutions also drive step (2) of the aforementioned reaction by providing an electron acceptor, thus they are suitable for use in the aqueous solution of the instant invention. Additionally, it has been found that adding copper to water and/or dilute aqueous solution of acid speeds the rate of oxygen absorption by the iron. It is believed that the copper induces a phenomena called electrolytic corrosion. Electrons flow from the iron to the copper, where their energy is lower. This removes the excess negative charge from the iron. In addition H atoms, which now form on the negative copper surface instead of the iron, detach themselves more readily from copper than from iron, thus accelerating step (3) of the aforementioned reaction.

As shown in FIGS. 1-3 (a and b), the aqueous solution can be introduced into the packet utilizing an injection type process. Alternatively, the solution can be included in the absorber packet in a separate capsule or compartment which can be ruptured at the time of sealing the meat package. Also, a wick could be included in, and protrude from, the packet such that the wick could be dipped in liquid just prior to sealing the meat package.

A preferred embodiment of the present invention involves the injection of an oxygen uptake accelerator comprising water into the MRM absorbers manufactured by Multiform Desiccants Incorporated. This is done just prior to the placement of the absorber into a package. This can be done manually with a syringe and hand placement or the process can be automated by using a commercially available metering and dispensing pump such as the Luft Systematic model 45/50 and appropriate conveying equipment to position the packets for injection and then subsequently to place the packets into a package.

The following data, depicted in FIGS. 5-13 and in Table 1 is specific to Multiform's MRM 100 scavenger packets. All of these experiments involve using

these scavengers. The MRM 100 oxygen scavengers are specifically formulated to work in the presence of CO₂ and refrigeration. MRM 100 oxygen scavengers contain approximately 2.5 grams of iron and silica gel impregnated with a carbon dioxide generator, NaHCO₃. A carbon dioxide generator is utilized to replace gas volume in the sealed meat package as O₂ is absorbed. The iron in MRM absorbers is electrolytically reduced and annealed which means that the iron is reduced by the passage of electric current through a solution of the iron which is in the form of a molten salt. As one skilled in the art will appreciate, while MRM 100 scavenger packets were used in the following described experiments, similarly constituted scavenger packets would be expected to have comparably enhanced oxygen scavenging activities with the addition of water and other accelerators.

FIGS. 5 and 6 illustrate that the oxygen uptake accelerator, in this case water, must be contained within the oxygen scavenging packet in order to increase the rate of oxygen absorption. Specifically, FIG. 5 shows the decrease in percent oxygen as a function of time when 0.5 mL of water is merely present in a quart-sized jar along with an oxygen scavenging packet. As shown in FIG. 5, at 40°F it takes approximately 30 hours for the percent oxygen to be reduced to approximately 0.5% (5,000 PPM) and more than 40 hours for the percent oxygen to be reduced to near 0% oxygen. By contrast, FIG. 6 shows the decrease in percent oxygen as a function of time when 0.5 mL of water is injected into an oxygen scavenging packet which is then placed in a quart-sized jar. At 40°F, it takes approximately 15 hours for the percent oxygen to be reduced to approximately 0.5% and about 20 hours for the percent oxygen to be reduced to near 0% oxygen. At 70°F, oxygen is scavenged much more quickly.

FIG. 7 shows that the oxygen scavenging rate is maximized when 0.6 mL of water is present in the oxygen scavenging packet.

FIG. 8 shows that oxygen absorption appears to be independent of the amount of carbon dioxide in the container.

FIG. 9 shows that two oxygen scavenging packets absorb oxygen at nearly twice the rate of one packet.

As shown in FIG. 10, acetic acid, commonly known as vinegar acid, works particularly well in accelerating the rate of oxygen absorption of an MRM oxygen

scavenger packet. Specifically, the injection of 0.5 mL of acetic acid into each of two absorber packets reduces the amount of oxygen in a quart jar to approximately 0.1% O₂ (1000 PPM) in one hour. As shown in FIG. 11, the percent O₂ is reduced to approximately 0.04% O₂ (400 PPM) in about ninety minutes when 0.5 mL of acetic acid is injected into each of two MRM 100 scavenger packets. Two conclusions can be drawn from the data in FIGS. 10 and 11. First, injected acetic acid seems to work better than plain water in increasing the rate of oxygen absorption of an absorber packet. Second, from FIG. 10, 0.5 mL acetic acid appears to work particularly well in increasing the rate and total amount of oxygen absorption. In the experiments resulting in the data in FIGS. 10 and 11, the starting level of oxygen in the jars was 2%, simulating the amount of oxygen which would be present after the gas flush step of a gas flush MAP process. Also, the experiments were performed under refrigeration.

Below is a table which shows the results of an experiment designed to determine the range of amounts of water needed to be introduced into an oxygen scavenging packet containing approximately 2.5 grams of iron in order to satisfactorily activate the packets in a gas flush MAP packaging process for red meat.

Table 1

Sample No.	Water Injection	Initial Oxygen	Final Oxygen	Color Rating - 1.5 hrs. Of Bloom (Day 8)	Color Rating - 24 hrs. Of Bloom (Day 9)
1	0.8 mL	1.9%	0%	Dark Red	Some Browning
2	0.6 mL	1.24%	0%	Dark Red	Bright Red
3	1 mL	2.3%	0.26%	Major Browning	Major Browning
4	0.4 mL	2.2%	0%	Dark Red	Bright Red
5	0.2 mL	1.7%	0%	Dark Red	Dark Red
6	0.4 mL	1.5%	14.9%	Excluded (Leaked)	Excluded
7	0.8 mL	1.7%	0%	Dark Red	Dark Red
8	0.6 mL	1.55%	0%	Dark Red	Bright Red
9	1 mL	2.2%	0%	Dark Red	Some Browning
10	0.2 mL	2.4%	0%	Major Browning	Major Browning

The results show that water injections greater than 0.2 mL but less than 0.8 mL per 2.5 grams of iron (approximately 100cc of absorber capacity) are required to prevent browning of meat. For adequate oxygen scavenging, water injections are within this range, preferably at 0.6 milliliters. Water injections outside of this range

resulted in a high risk of metmyoglobin formation (browning) due to initial oxygen exposure. This experiment was performed utilizing MultiForm's MRM oxygen scavengers but other similar iron-based absorbers are believed to work comparably.

Example 1

5 **Determination Of Range Of Water Volume Necessary For Optimal Oxygen Scavenging Of An Iron-Based Oxygen Scavenging Packet**

10 A ten pound chunk of fresh boneless beef (five days post mortem) was cut into ten pieces and individually placed on meat trays or a soaker pad. The meat trays had one and one half inch tall side walls. The meat and trays were then stretch wrapped
15 with a standard PVC film on a Hobart machine. After wrapping, a half inch diameter hole was created through the PVC in one corner of the tray to allow free flow of gases in and out of this "inner package." Next, two MRM 100 scavengers were injected with a precisely measured amount of water and attached to one of the inner packages containing the beef. The water injections were varied from 0.2 to 1 mils per
20 scavenger. The inner package, with the oxygen absorbers attached, was then immediately run through a Fuji/Foremost form fill and seal machine and packaged in a flushed outer bag made from Print Pack 861D 2.5 mil barrier film. The flush gas was approximately 80% nitrogen and 20% carbon dioxide. The initial O₂ level in the barrier bag was measured through a rubber septum with a Dansensor oxygen analyzer
25 and recorded. The completed packages were then placed in a refrigerator and stored at 34°F for eight days. On the eight day the final oxygen level was measured and the barrier bag and oxygen absorbers removed. The meat was allowed to rebloom in the inner package for one and a half hours in the refrigerator. At that time the packages were removed from the refrigerator and the meat visually rated for color acceptability.
30 The packages were then returned to the refrigerator for another 24 hours after which the meat was again rated for color acceptability.

30 The tray that was used for the experiment detailed in Example 1 and the data detailed in Table 1 left a significant amount of air space surrounding the meat, necessitating the use of two MRM 100 scavengers. However, beef has been
30 successfully packaged on shallow wall meat trays using only one MRM 100 scavenger with a 0.5 mL injection of acetic acid.

FIG. 12 shows that maximum oxygen absorption occurs at an amount of vinegar between about 0.4 and 0.6 mL acetic acid. FIG. 12 also illustrates that maximum oxygen absorption occurs when the oxygen-scavenging packet contains silica gel impregnated with NaHCO_3 in addition to iron. MRM-100 absorbers and other similarly formulated absorbers employ silica gel to absorb and release atmospheric H_2O . As discussed previously, silica gel will not by itself absorb enough water to satisfactorily accelerate the oxygen scavenging ability of the iron to allow for the preservation of meats for longer than a few days at a time. For this reason, the present inventors have affirmatively added concrete amounts of water to the oxygen scavenging packets of the instant invention.

FIG. 13 shows the rate of oxygen absorption as a function of time and the concentration of acetic acid in water. As can be seen, 5% acetic acid performs very well at accelerating the rate of oxygen absorption at 30, 60 and 90 minutes. Furthermore, 5% acetic acid is very easy to obtain, being common table vinegar.

The present invention is particularly useful when used in a modified atmosphere packaging (MAP) process for fresh meats. The MAP process is a gas flush process that initially flushes the package to an oxygen atmosphere of about 2% or less. The oxygen scavenging packet of the instant invention is utilized to additionally reduce the oxygen level of the package to 400 PPM (0.04%) or less within ninety minutes.

A brief description of the typical modified atmosphere package will follow. This description is not meant to be limiting, but instead is provided merely to elucidate one particular use for the instant invention.

FIG. 4 depicts a modified atmosphere package 40 including an outer container 42 and an inner container 44. The inner container 44 includes a conventional semi-rigid plastic tray 46 thermoformed from a sheet of polymeric material which is substantially permeable to oxygen. Exemplary polymers which may be used to form the non-barrier tray 46 include polystyrene foam, cellulose pulp, polyethylene, polypropylene, etc. In a preferred embodiment, the polymeric sheet used to form the tray 46 is substantially composed of polystyrene foam and has a thickness ranging from about 100 mils to about 300 mils. The use of a common polystyrene foam tray 46 is desirable because it has a high consumer acceptance. The inner container 44

outer container 42 is flushed with an appropriate mixture of gases, typically about 30% carbon dioxide and about 70% nitrogen, to lower the oxygen level in the outer container 42 to about 0.05 to 5% or 500 to 50,000 parts per million (PPM). Prior to or simultaneously with flushing the outer container 42, but still prior to sealing the outer container 42, the oxygen scavenging packet 52 is placed in the outer container 42 external to the sealed inner container 44. The outer container 42 is then sealed.

After a time period of about ninety minutes, the oxygen scavenging packet 52 lowers the oxygen level in the bag from its initial level of oxygen to less than about 0.04% or 400 PPM and most preferably to about 0%. The oxygen uptake accelerator contained within the oxygen scavenging packet 52 is responsible for this fast rate of oxygen absorption. The oxygen scavenger 52 also absorbs any oxygen which might permeate into the outer container 42 from the ambient environment. In FIGS. 1 through 4, the oxygen scavenger 10, 20, 30, and 52 respectively, is illustrated as a packet or label which is inserted into the outer container 42 prior to sealing the outer container 42. Alternatively, an oxygen scavenging material may be added to the polymer or polymers used to form the outer container 42 so that the oxygen scavenging material is integrated into the outer container 42 itself.

The retail cut of raw meat 50 within the package 40 takes on a purple-red color when the oxygen is removed from the interior of the package 40. The meat-filled modified atmosphere package 40 may now be stored in a refrigeration unit for several weeks prior to being offered for sale at a grocery store. A short time (e.g., less than one hour) prior to being displayed at the grocery store, the inner container 44 is removed from the outer container 42 to allow oxygen from the ambient environment to permeate the non-barrier tray 46 and non-barrier cover 48. The purple-red color of the raw meat 50 quickly changes or "blooms" to a generally acceptable bright red color when the raw meat 50 is oxygenated by exposure to air.

Example 2

A sealed 8 gram packet (TRM, Multisorb Technologies Inc.) containing about 68 wt% iron in a porous packet made of compressed polyethylene fibers was placed in a 4 liter multilayer bag (nylon-PE-EVA, thickness 3 mils (0.075 mm), tensile strength 15,000 lb/in² (103.4 MPa), oxygen permeability 3.9 cc/100 in²/24 hours (60.4 mL/m²/24 hours)). The multilayer bag was filled with a gas mixture of about 70 vol%

nitrogen, 28 vol% carbon dioxide, and 2 vol% oxygen. (Thus, the bag contained about 80 mL of oxygen). Then a predetermined volume of deionized water was injected into the oxygen absorbing packet and the multilayer bag was maintained at 37°F (2.8°C). Samples were taken periodically and the gas analyzed by Dansensor
5 Checkmate for its oxygen content. The results are reported in Table 2.

Table 2
Oxygen Content (vol%)

	(mL/H ₂ O)										
Time (min)	1.00	1.25	1.5	1.75		2		2.25	2.5	2.75	3
0	2.06	1.979	2.02	2.08	1.841	2.26	1.974	1.879	1.883	1.905	1.926
45	1.257	1.011	1.066	1.008	-	0.98	-	-	-	-	-
60	-	-	-	-	0.729	-	0.712	0.696	0.747	0.84	1.084
125	0.84	0.531	0.588	0.352	-	0.331	-	-	-	-	-
150	-	-	-	-	0.0389	-	0.0609	0.0818	0.1599	0.271	0.701
350	-	-	-	-	0	-	-	-	-	-	-
355	0.016	0	0	0	-	0	0	0	0	0	0.0788

Since each packet contained about 5.44 grams of iron, the amount of water
10 used in each packet may be given as follows.

mL H ₂ O	mL H ₂ O/2.5g Fe
1	0.46
1.25	0.57
1.5	0.69
1.75	0.8
2	0.92
2.25	1.03
2.5	1.15
2.75	1.26
3	1.38

It can be seen that for these packets, the capacity for oxygen was greater than those previously tested and the iron required was reduced significantly. The amount of water used for each 2.5 grams of iron was similar, however, to that found with
15 other packets, although it exceeded the maximum as previously defined. An optimum range is confirmed in that, if one compares the results, it is clear that the optimum range falls between 1 and 3 mL of H₂O, or 0.46 and 1.38 mL/2.5 grams of iron. It may be concluded that the optimum for this system is near or slightly above the

WHAT IS CLAIMED IS:

1. An oxygen scavenging packet, comprising:
 - a. an oxygen permeable material formed into a closed packet for holding an oxygen absorber;
 - b. an oxygen absorber comprising iron within the packet of (a); and
 - 5 c. a liquid oxygen uptake accelerator, said accelerator comprising water, said accelerator being present in an amount relative to the amount of said oxygen absorber, such that when the liquid accelerator and oxygen absorber are brought into contact, the oxygen absorber is capable of reducing the oxygen content of a predetermined volume containing about 2 vol% oxygen to less than 0.5 vol% oxygen at a temperature of about 34°F in a predetermined period of time after said accelerator and oxygen absorber are brought into contact;
- 10 said oxygen uptake accelerator being present in said packet in an amount between about 0.2 and 1.4 mL per 2.5 grams of iron.
2. An oxygen scavenging packet of Claim 1, wherein said accelerator is deionized water.
3. An oxygen scavenging packet of Claim 1, wherein said oxygen absorber of (b) further comprises silica gel and a carbon dioxide generator.
4. An oxygen scavenging packet of Claim 1, wherein said iron is electrolytically annealed and reduced.
5. An oxygen scavenging packet of Claim 1, wherein said oxygen uptake accelerator is contained within an enclosed space within said packet.
6. An oxygen scavenging packet of Claim 1, wherein said oxygen uptake accelerator is contained within a bibulous wick, said wick extending from the exterior of said packet into the interior of said packet.

Figure 1. The effect of the concentration of the *Agrobacterium* suspension on the transformation efficiency of *Agrobacterium* strains. The *Agrobacterium* strains were grown in YEA medium at 28°C for 24 h. The cell concentration was adjusted to 1.0 × 10⁸ cells/ml. The cell suspension was mixed with the plant tissue and incubated for 2 h at 28°C. The plant tissue was then co-cultured with the *Agrobacterium* suspension for 2 days at 28°C. The plant tissue was then washed with sterile water and cultured on the selective medium. The transformation efficiency was determined by the number of transformants per plant tissue. The data are the mean ± SD of three independent experiments.

5

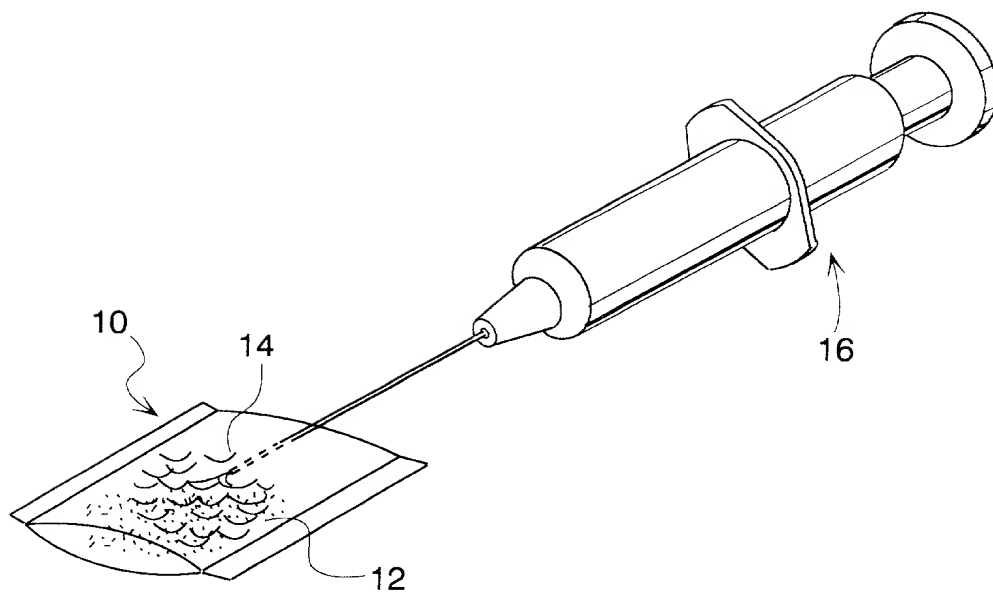


Fig. 1

Fig. 2b

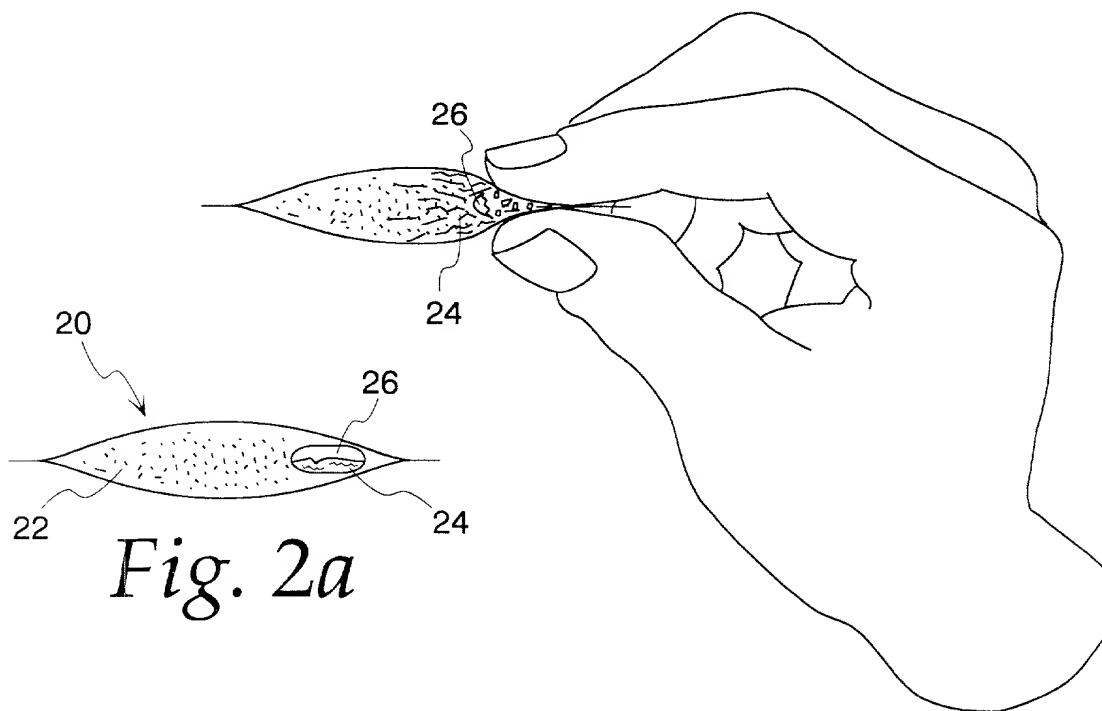


Fig. 2a

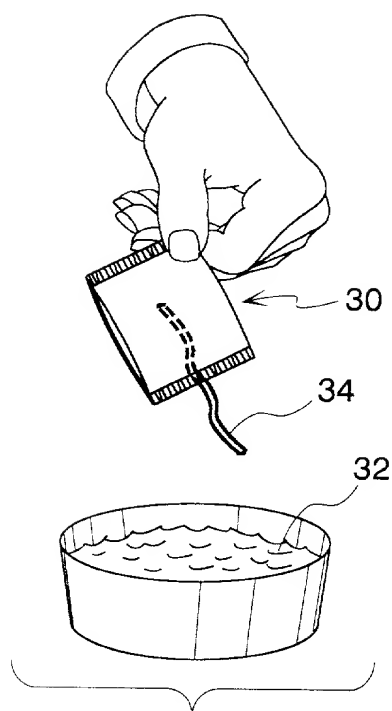


Fig. 3a

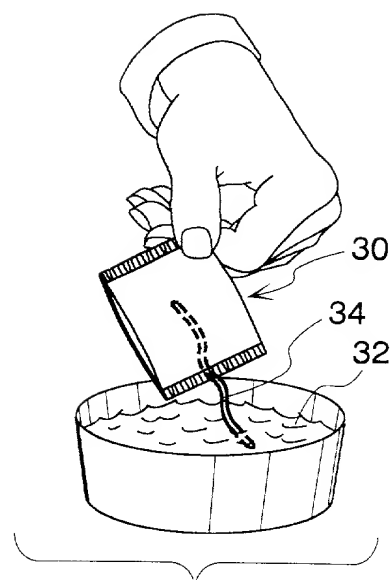


Fig. 3b

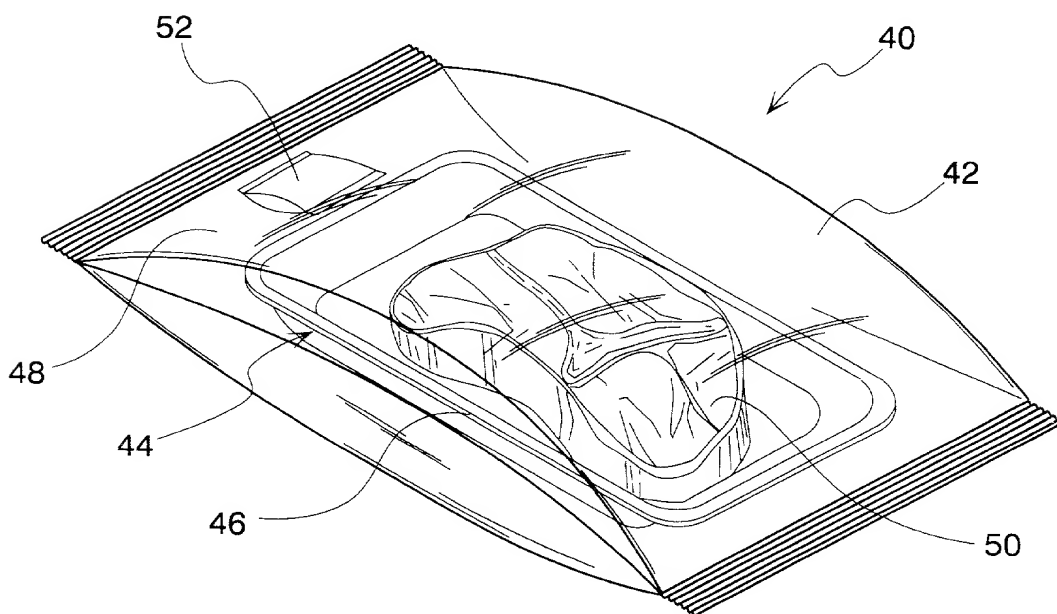


Fig. 4

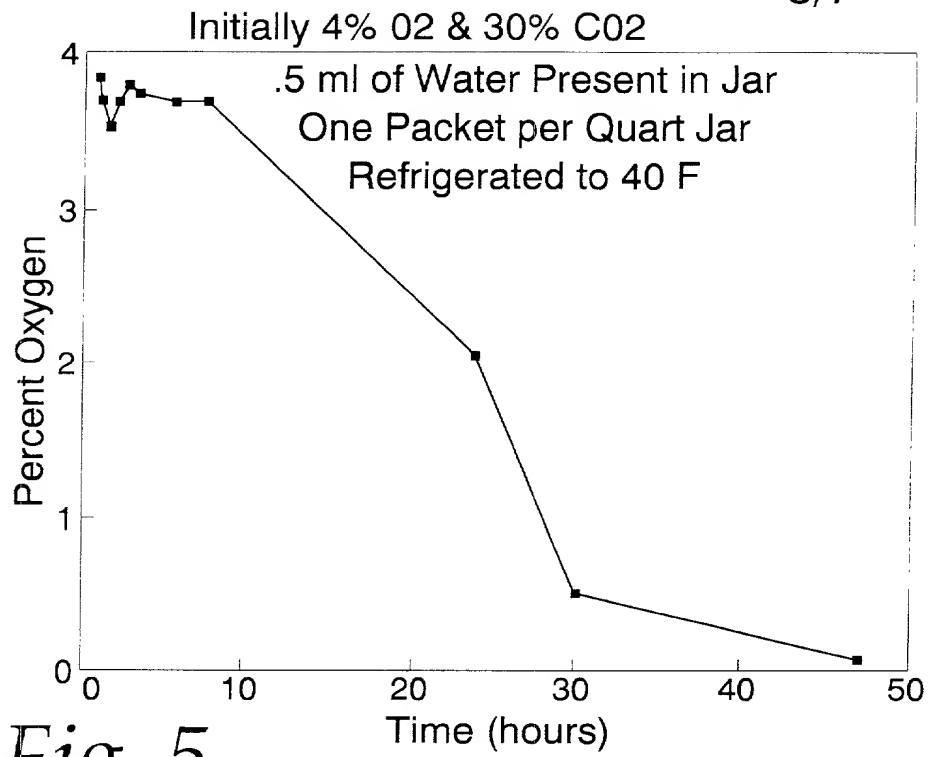


Fig. 5


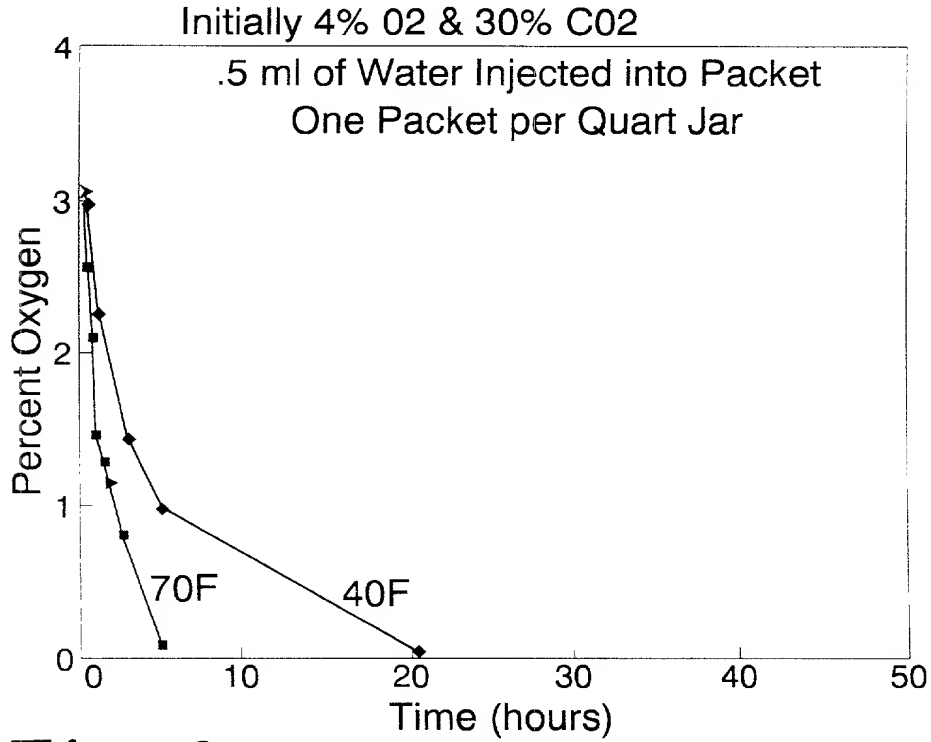


Fig. 6

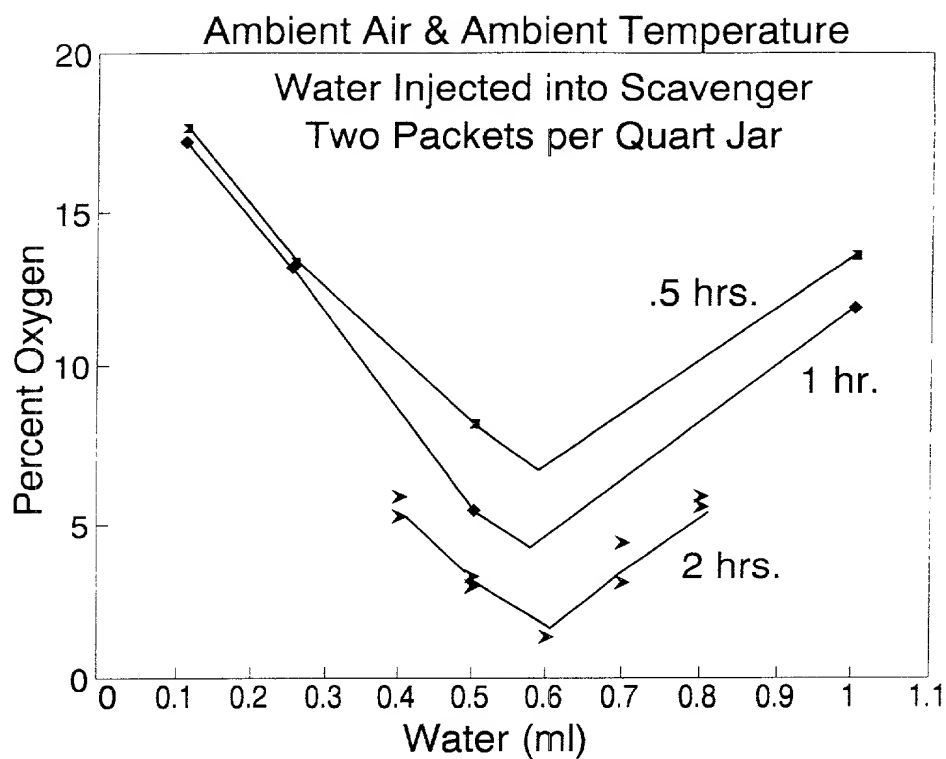

4/7

Fig. 7

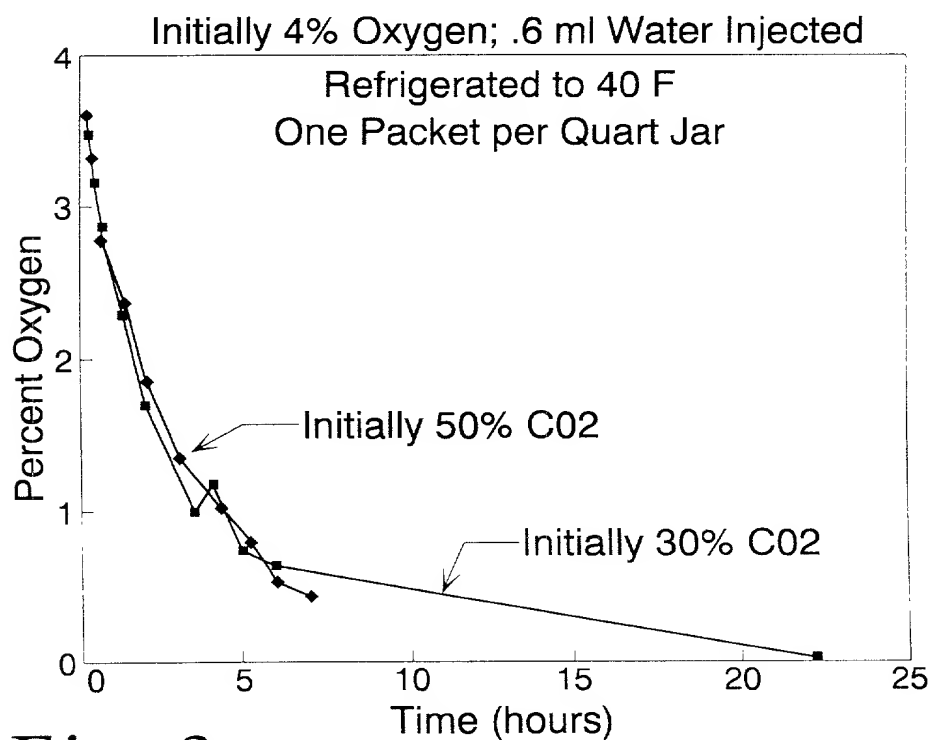


Fig. 8

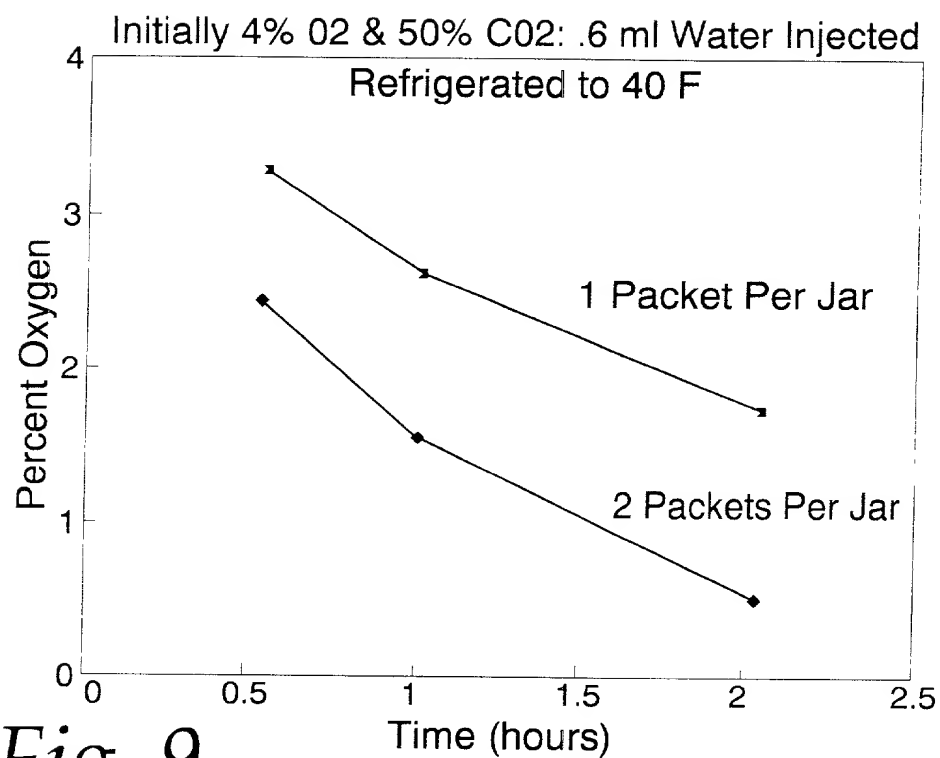


Fig. 9

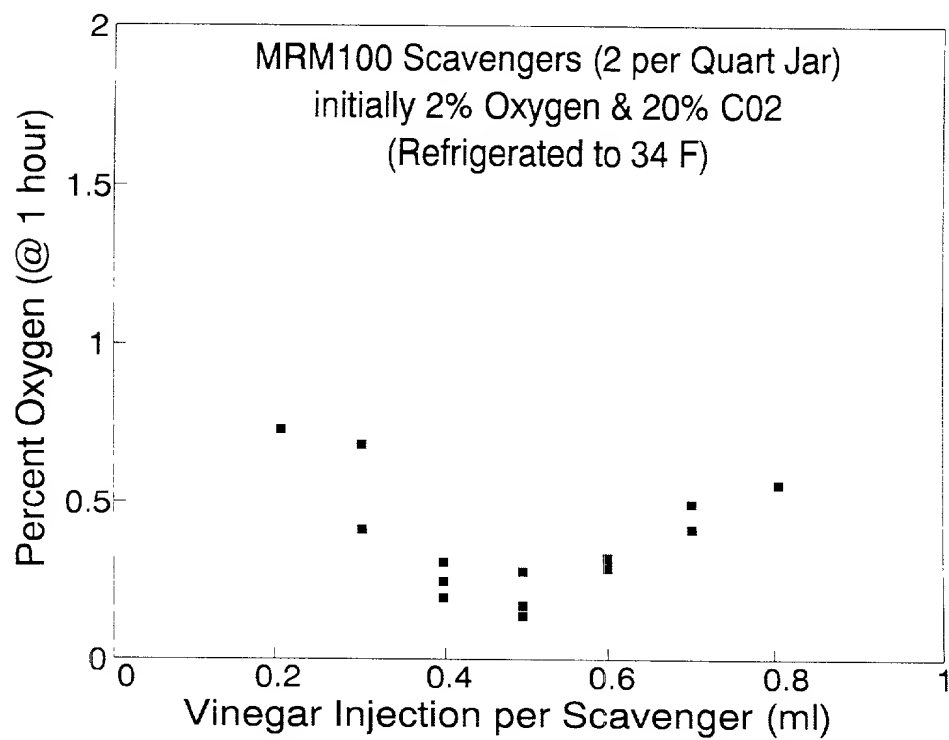


Fig. 10

6/7

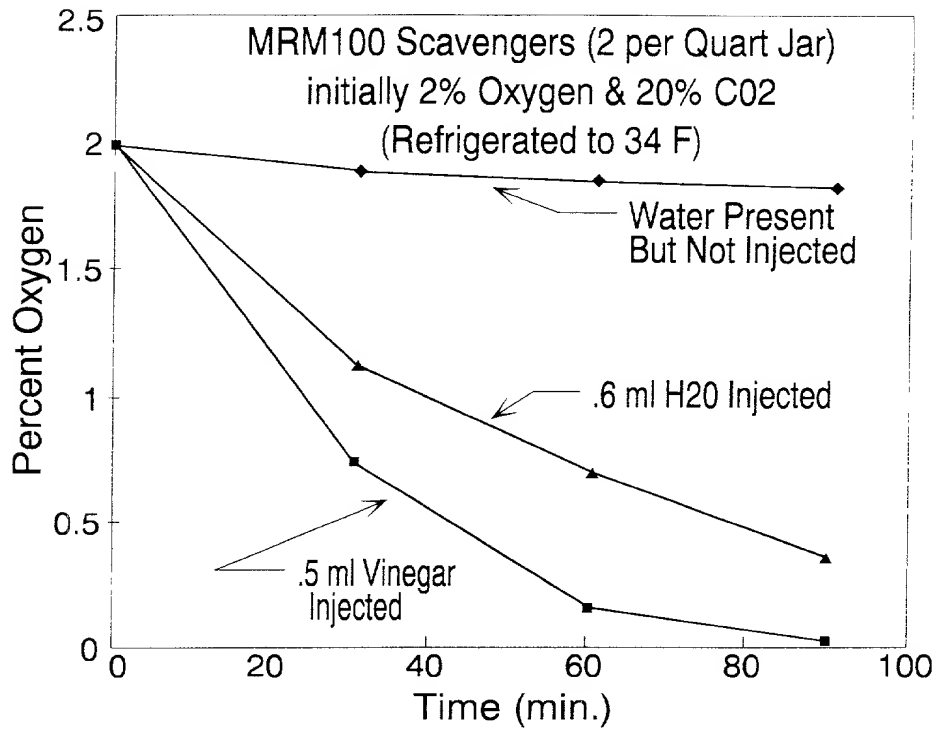


Fig. 11

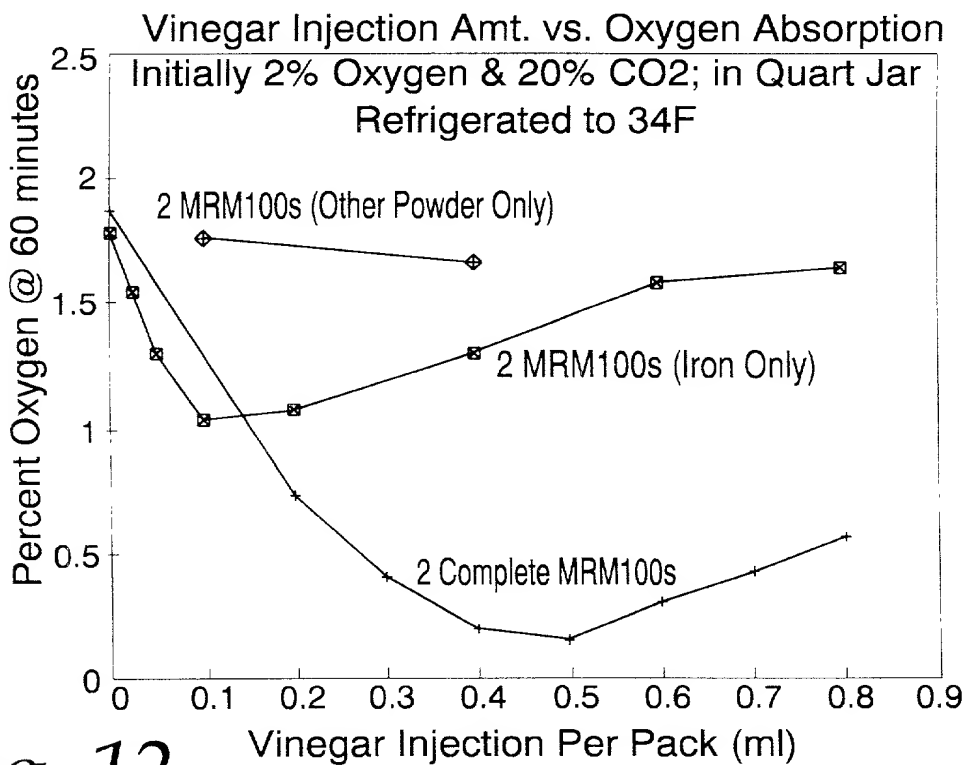
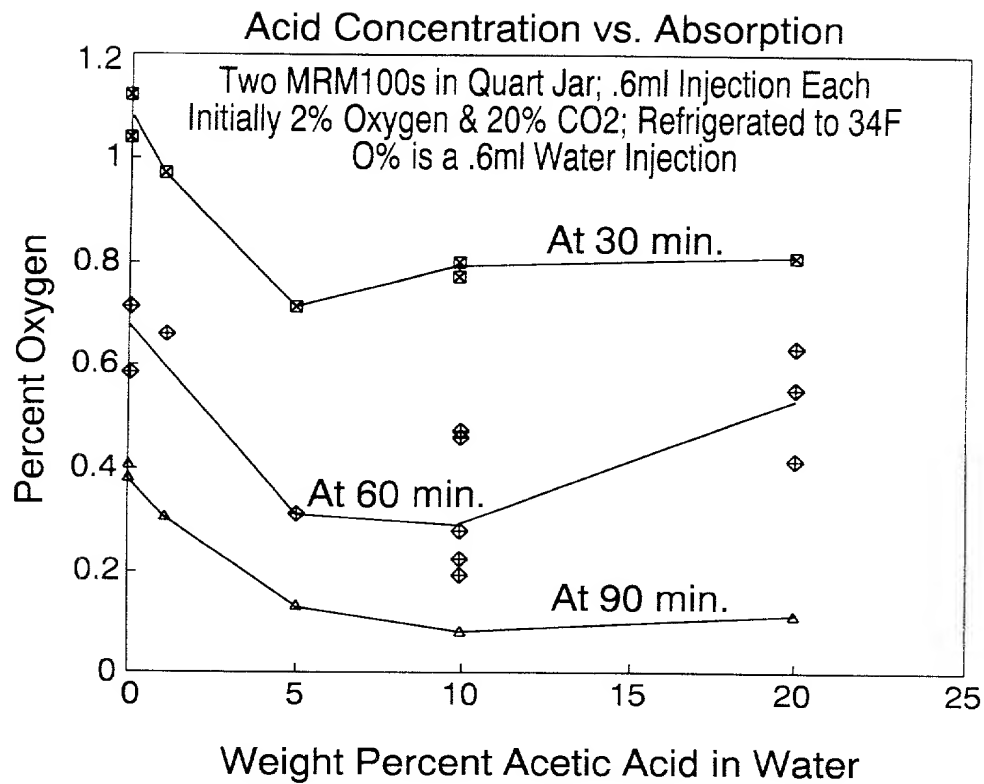


Fig. 12

*Fig. 13*

DECLARATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled "Oxygen Scavenger Accelerator," the specification of which was filed on January 10, 2000, as U.S. Application No. _____.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. § 1.56(a).

I hereby claim foreign priority benefits under 35 U.S.C. § 119 or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT international application, having a filing date before that of the application on which priority is claimed.

PRIOR FOREIGN APPLICATIONS

Priority
Claimed

Yes/No

Number Country Day/Month/Year Filed

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

Application Number Filing Date

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

<u>09/346,752</u> Application Number	<u>July 2, 1999</u> Filing Date	<u>Pending</u> Status
<u>08/856,448</u> Application Number	<u>May 14, 1997</u> Filing Date	<u>Issued</u> Status
<u>08/700,644</u> Application Number	<u>August 8, 1996</u> Filing Date	<u>Abandoned</u> Status

I hereby direct that all correspondence and telephone calls be addressed as follows.

Ronald B. Coolley
Reg. No. 27,187
Arnold White & Durkee
P.O. Box 4433
Houston, TX 77210
(312) 744-0090

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of first inventor: Susan P. Evans
Residence: 52 Holiday Lane, Canandaigua, NY 14424
Post Office Address: Same as Residence
Citizenship: U.S.A.

Inventor's signature: _____

Date: _____

Full name of second inventor: Vinod K. Luthra
Residence: 21 Barrington Hills, Pittsford, NY 14534
Post Office Address: Same as Residence
Citizenship: U.S.A.

Inventor's signature: _____

Date: _____

Full name of third inventor: Gary R. DelDuca
Residence: 82 Howell Street, Canandaigua, NY 14424
Post Office Address: Same as Residence
Citizenship: U.S.A.

Inventor's signature: _____

Date: _____